

B254002

TJC8



主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) : AWG30#~24#
- ▶ 适用基板厚度 (Applicable PC board thickness) : 1.2mm~1.6mm
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 2A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.02 \Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 1000M \Omega$
- ▶ 耐压 (Withstanding voltage) : 1000V AC/minute

材料及电镀规格 Material and Finish


型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
插座 WAFER	塑胶 HOUSING	PBT UL94V-0	N/A
	针PIN	黄铜 Barss	镀锡 Tin-plated
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	磷青铜 Phosphor bronze	0.2mm	镀锡 Tin-plated

产品尺寸图 Product size chart


 单位: mm 一般公差: ± 0.20

TERMINAL

B254002-4 TJC8




安装尺寸 (Mounting measurement)

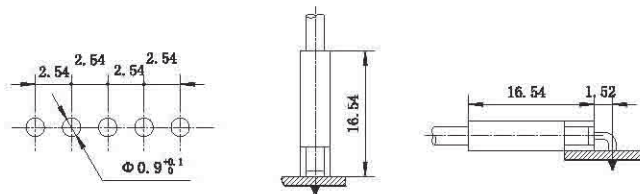


HOUSING

B254002-2




WAFER

B254002-1



B254002-1W

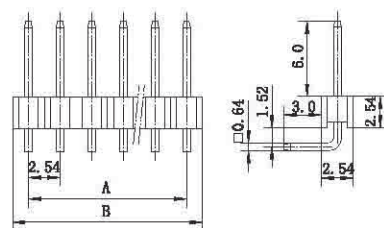

HOUSING

WAFER

极数 Circuits	型号 Type	尺寸 (Dimensions) mm		备注型号 P. S. Type
		A	B	
2	B254002-2-02	2.54	5.08	TJC8-02Y
3	B254002-2-03	5.08	7.62	TJC8-03Y
4	B254002-2-04	7.62	10.16	TJC8-04Y
5	B254002-2-05	10.16	12.70	TJC8-05Y
6	B254002-2-06	12.70	15.24	TJC8-06Y
7	B254002-2-07	15.24	17.78	TJC8-07Y
8	B254002-2-08	17.78	20.32	TJC8-08Y
9	B254002-2-09	20.32	22.86	TJC8-09Y
10	B254002-2-10	22.86	25.40	TJC8-10Y
11	B254002-2-11	25.40	27.94	TJC8-11Y
15	B254002-2-15	35.56	38.10	TJC8-15Y

极数 Circuits	型号 Type	尺寸 (Dimensions) mm		备注型号 P. S. Type
		A	B	
2	B254002-1-02	2.54	5.08	TJC8-02A
3	B254002-1-03	5.08	7.62	TJC8-03A
4	B254002-1-04	7.62	10.16	TJC8-04A
5	B254002-1-05	10.16	12.70	TJC8-05A
6	B254002-1-06	12.70	15.24	TJC8-06A
7	B254002-1-07	15.24	17.78	TJC8-07A
8	B254002-1-08	17.78	20.32	TJC8-08A
9	B254002-1-09	20.32	22.86	TJC8-09A
10	B254002-1-10	22.86	25.40	TJC8-10A
11	B254002-1-11	25.40	27.94	TJC8-11A
15	B254002-1-15	35.56	38.10	TJC8-15A