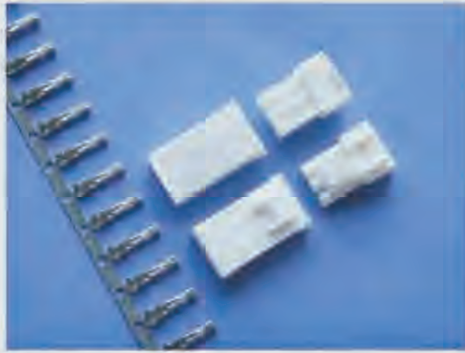


B396004

SL



- ▶ 主要技术特性 (Main Specifications)
- ▶ 适用导线规格 (Applicable wire) : AWG24#~18#
- ▶ 适用基板厚度 (Applicable PC board thickness) : —
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 300V AC, DC
- ▶ 额定电流 (Current rating) : 7A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 1500V AC/minute

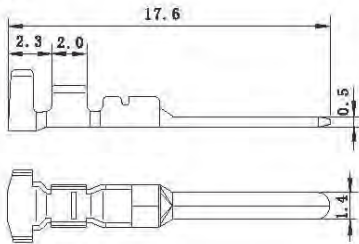

材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	铜青铜 Phosphor bronze	0.25mm	镀锡 Tin-plated

产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20

TERMINAL

B396004-3 SL-A

B396004-4 SL-Y


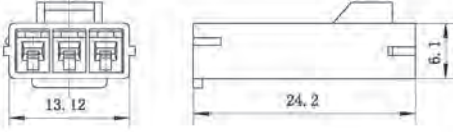
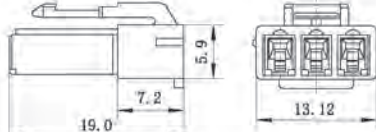
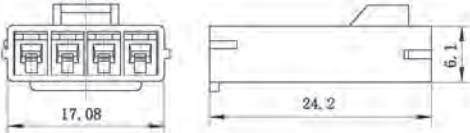
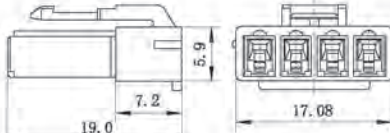
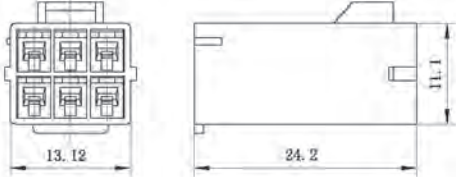
HOUSING

极数 Circuits	公端胶座 Male Housing (for pin contact)	母端胶座 Female Housing (for socket contact)
1	B396004-1-01 SLR-01VF 	B396004-2-01 SLP-01V
2	B396004-1-02 SLR-02VF 	B396004-2-02 SLP-02V

B396004

SL

HOUSING

极数 Circuits	公端胶座 Male Housing (for pin contact)	母端胶座 Female Housing (for socket contact)
3	<p data-bbox="291 415 453 444">B396004-1-03</p> <p data-bbox="487 415 613 444">SLR-03VF</p> 	<p data-bbox="859 415 1021 444">B396004-2-03</p> <p data-bbox="1055 415 1153 444">SLP-03V</p> 
4	<p data-bbox="291 767 453 796">B396004-1-04</p> <p data-bbox="487 767 613 796">SLR-04VF</p> 	<p data-bbox="859 767 1021 796">B396004-2-04</p> <p data-bbox="1055 767 1153 796">SLP-04V</p> 
6	<p data-bbox="291 1119 453 1148">B396004-1-06</p> <p data-bbox="487 1119 613 1148">SLR-06VF</p> 	<p data-bbox="859 1119 1021 1148">B396004-2-06</p> <p data-bbox="1055 1119 1153 1148">SLP-06V</p> 